

## Product information sheet LANORA-S-F

Item no. 526180

**Benefits** 



- Suitable for installation beneath window
- High-quality design in solid stainless steel, brushed finish
- Clear mixer tap design for modern kitchens
- High arched outlet with handspray for easy filling of pots and vases
- More freedom of movement with installations against a wall thanks to the control lever with vertical neutral position
- Energy-saving: basic setting of the control lever to cold start
- Minimum clearance between sink and window sash 4.5 cm

## Colours




solid stainless steel


Available colours:


stainless steel

Planning information
- *Minimum clearance between sink and window sash 4.5 cm.
Scope of supply
- 190° swivel spout for greater reach - Ø 35 mm tap hole required - With ceramic disk cartridge - Nylon-sheathed spray hose - Flexible connector pipes, 985 mm long and ¾" nut for particularly easy and safe installation - Patented jet regulator for markedly reduced scaling - Stabilisation plate to increase the stability of the tap when fitted in stainless steel sinks - With non-return valve and thus guaranteed against reflux in accordance with EN 1717 - LGA approved - DVGW approved
Details

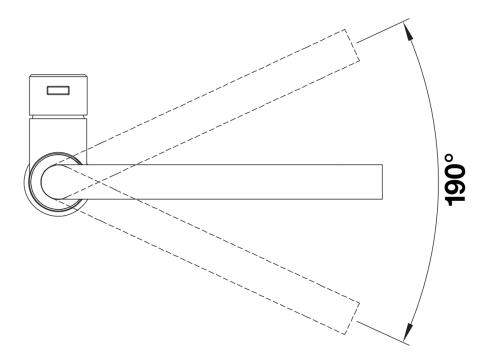

Swivel range

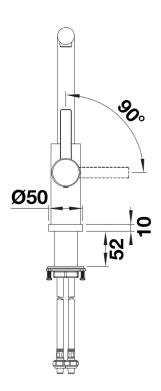

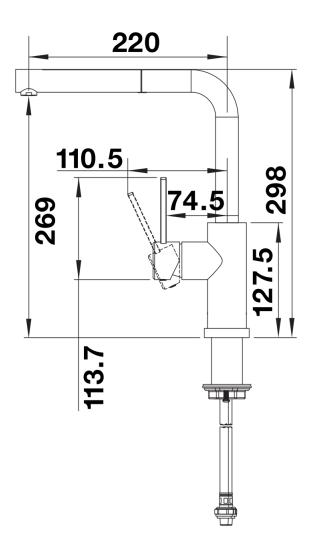

Side view