

Product information sheet DARAS-S-F

Item no. 521752

Benefits



- Can be installed in front of a window
- Simple to operate: lift straight up and lay on one side
- With extendable spray head
- Entry-level model
- Suitable for small sinks
- 80° swivel spout for greater reach
- Minimum clearance between sink and window sash 4 cm

Colours



Available colours:

chrome

galvanic chrome


Planning information

- *Minimum clearance between sink and window sash 4 cm.


Scope of supply

- 80° swivel spout
- Ø 35 mm tap hole required
- With ceramic disk cartridge
- Patented jet regulator for markedly reduced scaling
- Spray made of plastic
- Nylon-sheathed spray hose
- Hose weight for reliable retraction
- Flexible connector pipes, 950 mm long and $\frac{3}{8}$ " nut
- Stabilisation plate to increase the stability of the tap when fitted in stainless steel sinks
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717

Details

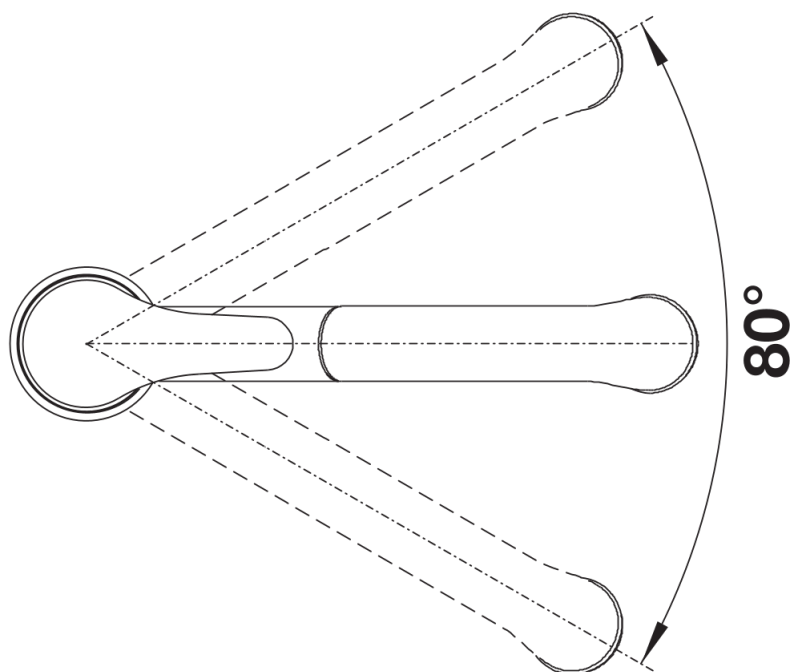

Swivel range

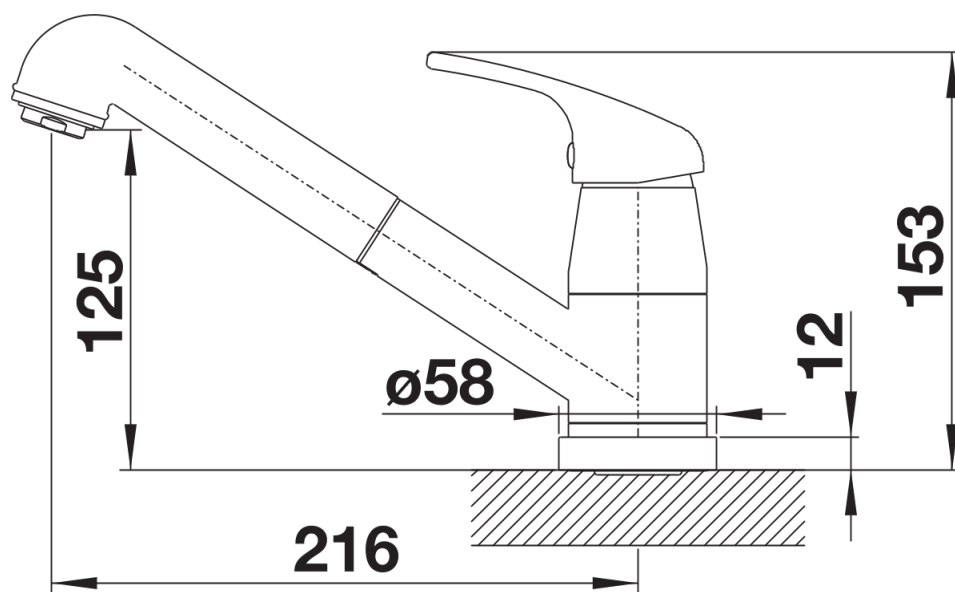

Side view