

## Product information sheet LINUS-S-F

Item no. 514276

### Benefits

---



- Suitable for installation beneath window
- Minimalist design
- Simple to operate: lift straight up and lay on one side
- High spout for easy filling of pans and vases
- Extendable spray head
- Minimum clearance between sink and window sash 4.5 cm

### Colours

---



Available colours:

chrome

galvanic chrome

## Planning information

---

- \*Minimum clearance between sink and window sash 4.5 cm.


## Scope of supply

---


- Single-lever mixer tap
- 140° swivel spout for greater reach
- Ø 35 mm tap hole required
- With ceramic disk cartridge
- Metal-sheathed spray hose
- Flexible connector pipes, 750 mm long and  $\frac{3}{8}$ " nut for particularly easy and safe installation
- Patented jet regulator for markedly reduced scaling
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717
- Stabilisation plate to increase the stability of the tap when fitted in stainless steel sinks

## Details


---

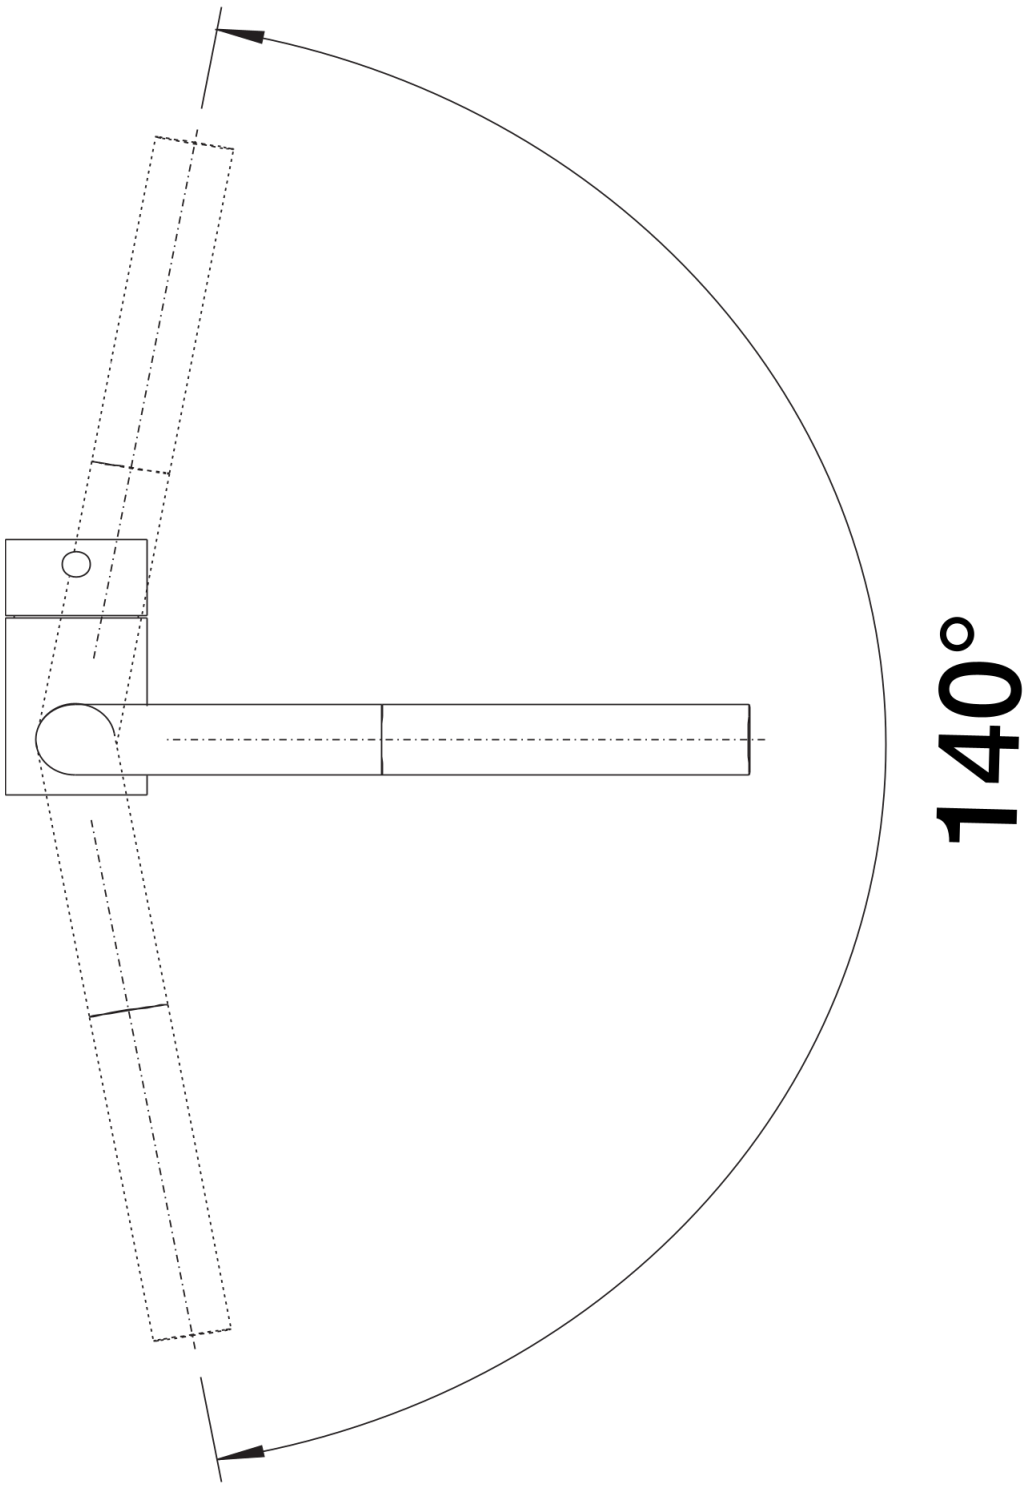

Swivel range

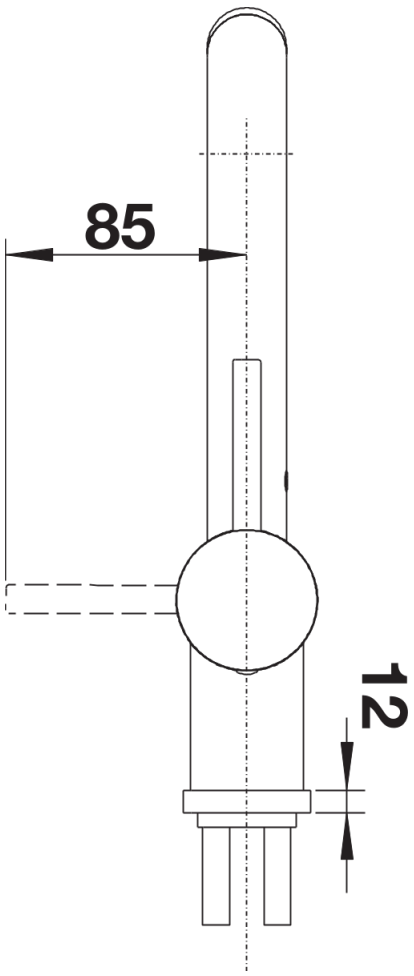

Side view hand gear 2D

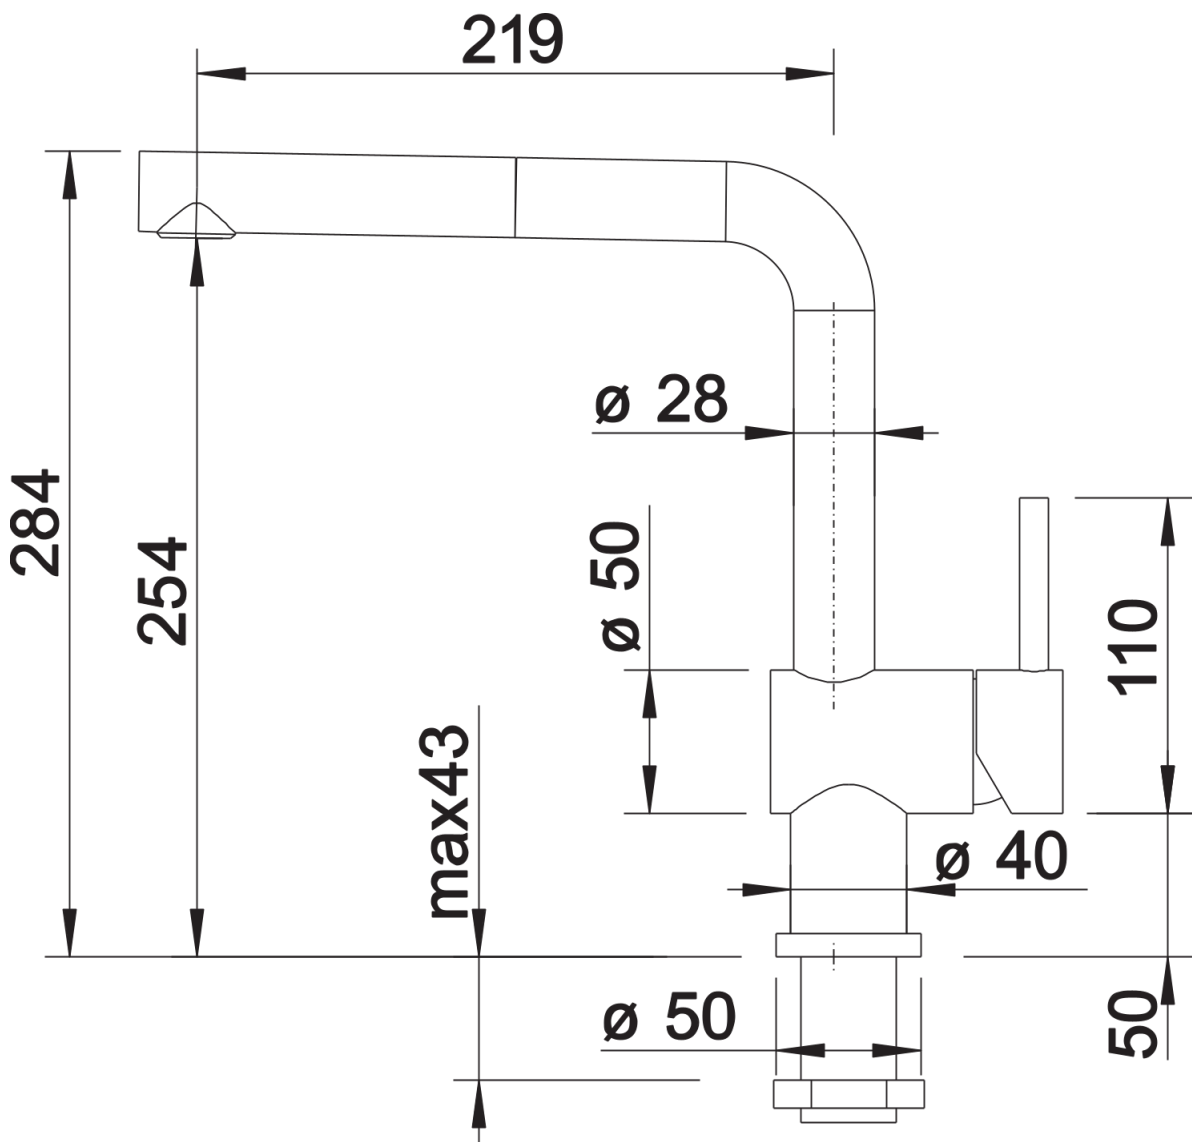

Side view